
REISS AUDIO
your car hifi specialist

OWNER'S MANUAL

3.5" NEODYMIUM COAXIAL SPEAKER

RS-CF38
4Ω

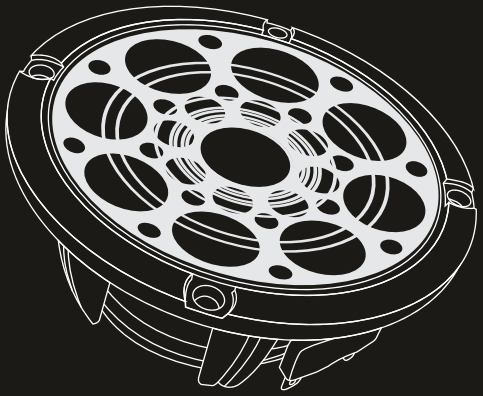

Since 1985
TURKISH ENGINEERING

RS-CF38

TECHNICAL SPECIFICATION

Type:	NEODYMIUM COAXIAL SPEAKER
Max Power:	70W
Rms Power:	35W
Impedance:	4Ω
Sensitivity(2.83V/1M):	88dB
Frequency Range:	110-22,000Hz
WF	
Frame:	3.5" Cast Aluminum With Black Painting
Cone:	Carbon Fibre With Rubber Surround
Voice Coil:	1" (25mm)
Magnet:	Neodymium
TW	
Frame:	Aluminium
Diaphragm:	Silk Dome
Voice Coil:	0.79" (20mm)
Magnet:	Neodymium

Thank you for purchasing our company car speakers.

Please read this instructions carefully before using and make sure you know speaker connections very well.
Before making holes.Check the mounting space with supplied template.


To prevent noise pick-up.Keep the wiring away from motors. High-voltage leads and other potential noise sources.

To prevent a short-circuit.Keep all wiring away from moving parts and sharp edges.


Make sure you carefully read and understand the installation instructions before installing the system in your vehicle.

RS-CF38

Product Dimensions

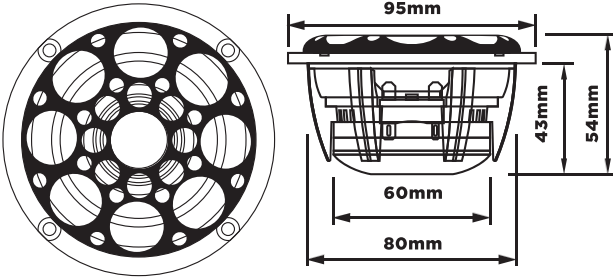

Connection Method

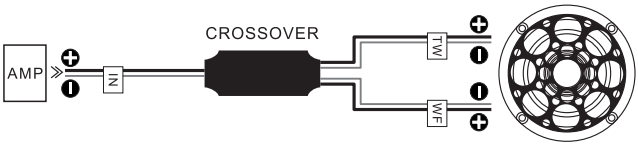

REISS AUDIO

your car hifi specialist

FOR MORE INFORMATION PLEASE VISIT

Join Our Community

www.reissaudio.com.tr