
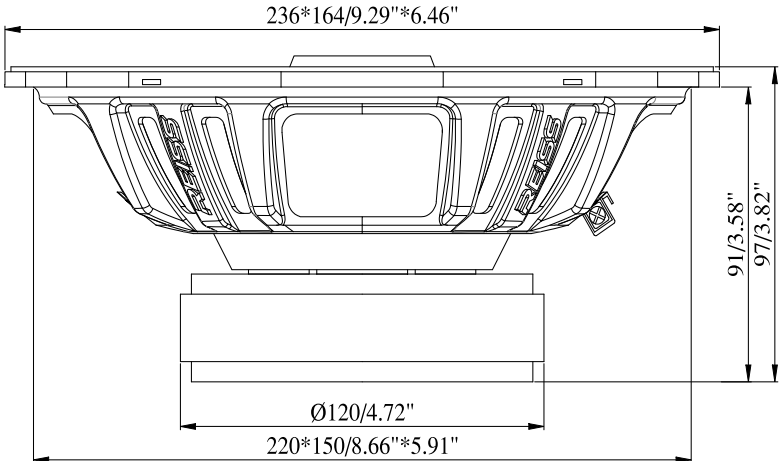


6x9 Inch 2 Way Coaxial Midrange Speaker

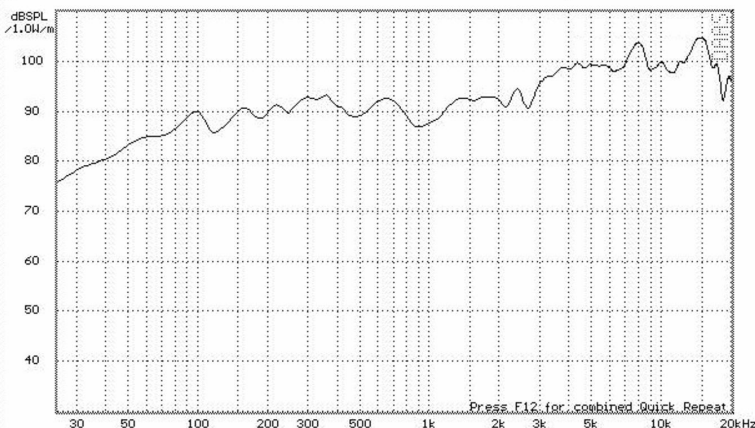

SPECIFICATIONS

General Data		Unit	FEATURES
Overall Dimensions	(236 x 164) x 97	mm	Steel Basket
Nominal Power Handling	200	W	Pressed Paper Cone, Treated Cloth Surround
Maximum Power	400	W	High Temperature KSV Voice Coil
Sensitivity	95	dB	Ferrite Magnet Structure
Frequency Response	80~20000	Hz	Tweeter: 1" CCAW Voice Coil, Aluminium Diaphragm
Cone Material	Pressed Paper		Dimensions 
Basket	Steel		
Net Weight	2.48	kg	
Electrical Data			Frequency Response 
Nominal Impedance	4	Ohm	
DC Resistance	3.2	Ohm	
Voice Coil and Magnet Parameters			
Voice Coil Diameter	38.6	mm	
Voice Coil Height	10	mm	
Magnetic Gap Height	6	mm	
Voice Coil Robbin	Kapton		
Number of Layers	2L		
T-S Parameters			
Suspension Compliance	346.048µM/N	Cms	
Mechanical Q Factor	6.853	Qms	
Electrical Q Factor	0.348	Qes	
Total Q Factor	0.332	Qts	
Moving Mass	12.13g	Mms	
Eq. Cas AIR Loaded	26.8L	Vas	
Resonant Frequency	77.683HZ	Fs	

Effective Piston Area	233.54cm ²	SD	
-----------------------	-----------------------	----	--