



OWNER'S MANUAL

RS-M6SE

6.5" COAXIAL MID-RANGE SPEAKER
WITH 1" VC BULLE TWEETER

4 Ω



Turkish Engineering Since 1985

SPECIFICATIONS

Nominal Diameter	6.5" / 165mm
Nominal Impedance	4 OHMS
RMS Power Handling	200 Watts
MAX Power Handling	400 Watts
Sensitivity(1w/1m)	95db
Frequency Response	120~20KHZ
Recommended Lo Pass Crossover	120HZ
Pair or Single	Pair

MOTOR

Voice Coil Diameter	1.5" / 38.6mm
Voice Coil Former	Kapton
Winding Material	Copper
Cone Material	Paper
Surround Material	Cloth
Magnet Material	Ferrite
Magnet Weight	24.6oz
Basket Material	Steel
Basket Color / Finish	Black

TWEETER SPECIFICATION


Voice Coil Diameter	1" / 25.4mm
Voice Coil Former	Kapton
Winding Material	CCAW
Diaphragm Material	Aluminium
Magnet Material	Neodymium
Magnet Weight	0.35oz

THIELE & SMALL PARAMETERS


Vas	6.103L
Xmax	5mm
Fs	119.016Hz
Qms	10.923
Qes	0.521
Qts	0.497
Mms	11.177
Cms	159.996µM/N
BL	7.165 TM
Le	140.786uH
Sd	163.9cm2
Re	3.2 Ohms

MEASUREMENTS




Overall Diameter (Without Grille)	173mm/6.81"
Overall Diameter (With Grille)	173mm/6.81"
Overall Depth (Without Grille)	85mm/3.35"
Overall Depth (With Grille)	88mm/3.46"
Front Mount Baffle Cutout	Ø150mm/5.91"
Mounting Depth	70mm/2.76"
Motor Diameter	Ø110mm/4.33"

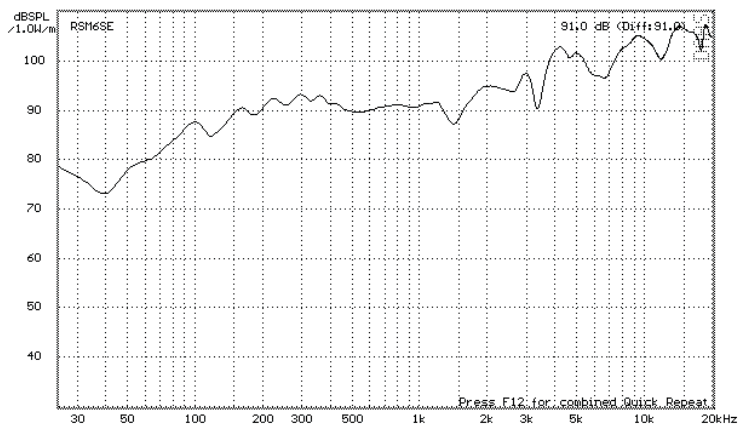

MEASUREMENTS
WITHOUT GRILLE

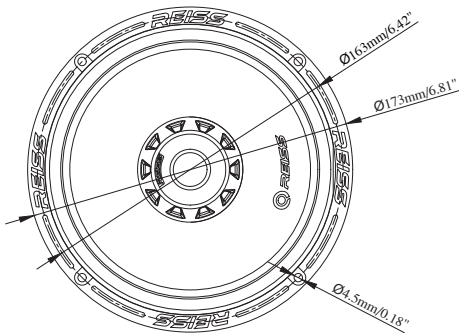

MEASUREMENTS
WITH GRILLE

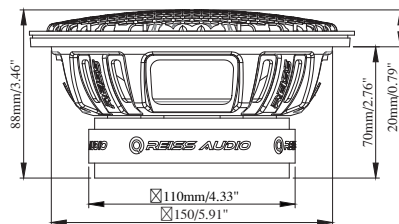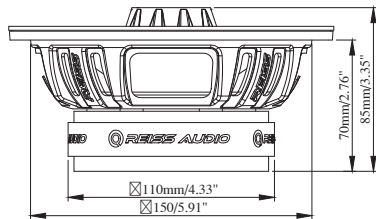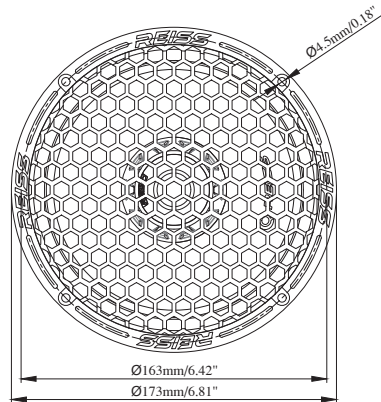



**FOR MORE INFORMATION
PLEASE VISIT
www.reissaudio.com.tr**

Turkish Engineering Since 1985

REİS ELEKTRONİK SANAYİ VE TİCARET A.Ş
İstoç Toptancılar Sitesi 15. Ada No:1-3-5-7
Mahmutbey Bağcılar / İstanbul - TÜRKİYE