

20CM Mid-Range Speaker




SPECIFICATIONS

General Data		Unit
Overall Dimensions	Ø217 x 103	mm
Nominal Power Handling	200	W
Maximum Power	750	W
Sensitivity	96	dB
Frequency Response	80~10000	Hz
Cone Material	Paper	
Basket	Aluminium	
Net Weight	4.36	kg

FEATURES

- Stamp Steel Basket
- Reinforced Pulp Paper Cone, Treated Cloth Surround
- Dome Paper Dust Cap
- High Temperature CCAW Voice Coil
- Ferrite Magnet Structure

Dimensions

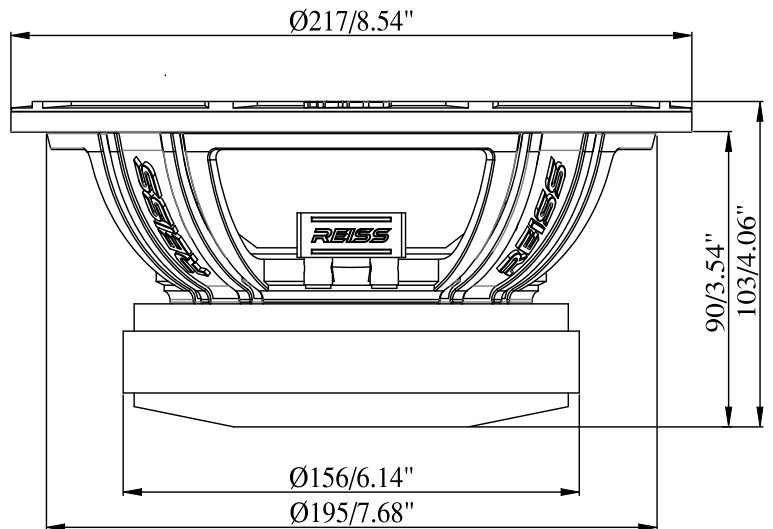

Electrical Data

Nominal Impedance	4	Ohm
DC Resistance	3.2	Ohm

Voice Coil and Magnet Parameters

Voice Coil Diameter	50.8	mm
Voice Coil Height	11	mm
Magnetic Gap Height	8	mm
Voice Coil Robbin	TIL	
Number of Layers	2L	

T-S Parameters

Suspension Compliance	185.923µM/N	Cms
Mechanical Q Factor	5.764	Qms
Electrical Q Factor	0.394	Qes
Total Q Factor	0.369	Qts
Moving Mass	18.942g	Mms
Eq. Cas AIR Loaded	15.610L	Vas
Resonant Frequency	84.8Hz	Fs
Effective Piston Area	243.16cm ²	SD

