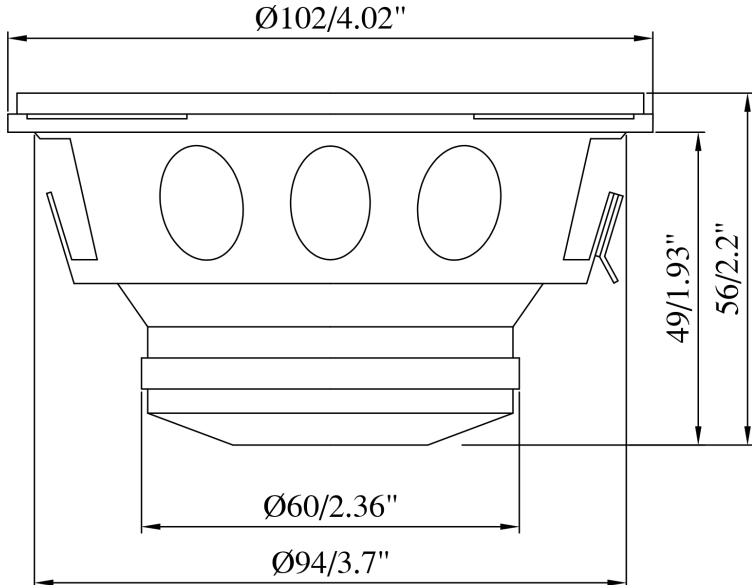
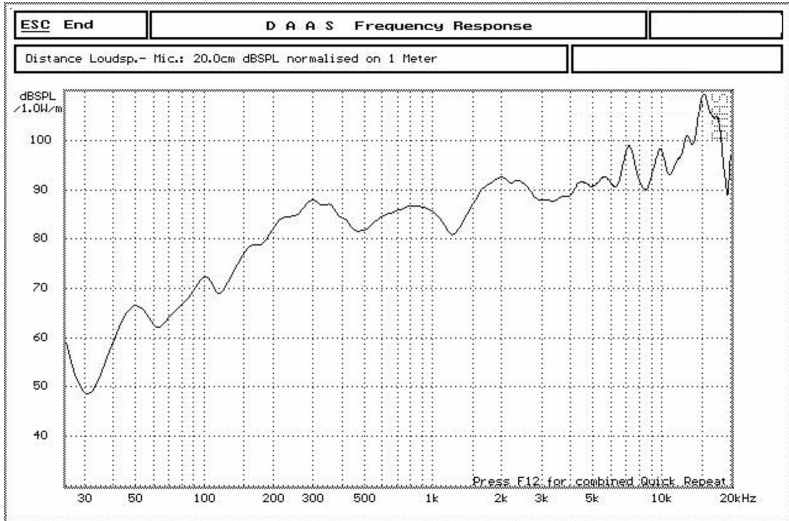


10 CM Mid-Range Speaker				
SPECIFICATIONS				
General Data		Unit	FEATURES	
Overall Dimensions	Ø102x56	mm	Steel Basket	
Nominal Power Handling	60	W	Reinforced Pulp Paper Cone, Treated Cloth Surround	
Maximum Power	120	W	Paper Dustcap	
Sensitivity	90	dB	High Temperature CCAW Voice Coil	
Frequency Response	250~15000	Hz	Neodymium Magnet Structure	
Cone Material	Paper		Dimensions	
Basket	Steel			
Net Weight	0.42	kg		
Electrical Data				
Nominal Impedance	6	Ohm		
DC Resistance	4.8	Ohm		
Voice Coil and Magnet Parameters				
Voice Coil Diameter	25.9	mm		
Voice Coil Height	6.5	mm		
Magnetic Gap Height	5	mm		
Voice Coil Robbin	Kapton			
Number of Layers	2L		T-S Parameters	
Suspension Compliance				
Mechanical Q Factor	5.814	Qms		
Electrical Q Factor	0.643	Qes		
Total Q Factor	0.579	Qts		
Moving Mass	3.615g	Mms		
Eq. Cas AIR Loaded	0.896L	Vas		
Resonant Frequency	188.97Hz	Fs		
Effective Piston Area	56.72cm²	SD		